

MOD: MD12/B5-R2P

Production code: OI120PSVND97BH

Controllers for refrigerated cabinets, counters and islands








- Power supply 115 or 230 VAC (according to the model)
- Cabinet probe and evaporator probe (NTC)
- Door switch input.
- Compressor relay 16 A res. @ 250 VAC.

Purchasing code	Relays	Probes (NTC)	Power supply
EV3L21N5	1	1	115 VAC
EV3L21N7	1	1	230 VAC
EV3L22N5	2	2	115 VAC
EV3L22N7	2	2	230 VAC
EV3L23N5	3	2	115 VAC
EV3L23N7	3	2	230 VAC

MEASUREMENTS AND INSTALLATION

rements in mm (inches). To be fitted to a panel, snap-in brackets provided

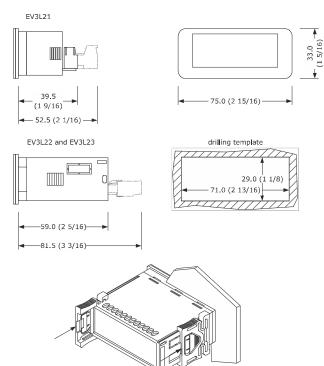


INSTALLATION PRECAUTIONS


- The thickness of the panel must be between 0.8 and 2.0 mm (1/32 and 1/16 in) Ensure that the working conditions are within the limits stated in the TECHNICAL
- Do not install the device close to heat sources, equipment with a strong magnetic field,
- in places subject to direct sunlight, rain, damp, excessive dust, mechanical vibrations or shocks.
- In compliance with safety regulations, the device must be installed properly to ensure adequate protection from contact with electrical parts. All protective parts must be fixed in such a way as to need the aid of a tool to remove them.


2 ELECTRICAL CONNECTION



Use cables of an adequate section for the current running through them. To reduce any electromagnetic interference connect the power cables as far away







PRECAUTIONS FOR ELECTRICAL CONNECTION

- If using an electrical or pneumatic screwdriver, adjust the tightening torque.
 - If the device has been moved from a cold to a warm place, the humidity may have caused condensation to form inside. Wait about an hour before switching on the
- Make sure that the supply voltage, electrical frequency and power are within the set limits. See the section TECHNICAL SPECIFICATIONS.
- Disconnect the power supply before doing any type of maintenance
- Do not use the device as safety device.
- For repairs and for further information, contact the EVCO sales network


3 FIRST-TIME Install following the instructions given in the section MEASUREMENTS AND INSTALLA-

- Power up the device as shown in the section ELECTRICAL CONNECTION and an internal
- The test normally takes a few seconds, when it is finished the display will switch off. Configure the device as shown in the section Setting configuration parameters.

ı		Recommended configuration parameters for first-time use.				
I	PAR.	DEF.	PARAMETER	MIN MAX.		
I	SP	0	setpoint	r1 r2		
I	P2	0	temperature unit of measurement	0 = °C 1 = °F		
I	d1	0	defrost type	0 = electric 1 = hot gas		

Then check that the remaining settings are appropriate; see the section CONFIGURA-TION PARAMETERS.

- Disconnect the device from the mains.
- Make the electrical connection as shown in the section ELECTRICAL CONNECTION without powering up the device.
- Power up the device

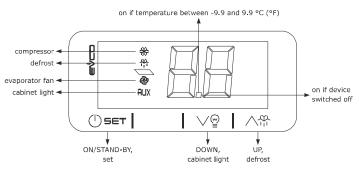

Switching the device on/off

(SET Touch the ON/STAND-BY key for 3 s.

If the device is switched on, the display will show the cabinet temperature; if the display shows an alarm code, see the section ALARMS

LED	ON	OFF	FLASHING
*	compressor on	compressor off	- compressor protection active - setpoint setting active
*	defrost active	-	defrost delay activedripping active
@	evaporator fan on	evaporator fan off	evaporator fan stop active
AUX	cabinet light on	cabinet light off	cabinet light on by digital input

If 30 s have elapsed without the keys being pressed, the display will show the "Lo" label and

4.2 Unlock keypad

Touch a key for 3 s: the display will show the label "Un".

Set the setpoint

- that the keypad is not locked.
- Touch the ON/STAND-BY key Touch the UP or DOWN key within 30 s to set the value within the limits r1 and r2 (default "-40... 50") ⊕s∈⊤ Touch the ON/STAND-BY key (or do not operate for 30 s).

Activate manual defrost

Check that the keypad is not locked

Touch the UP key for 3 s.

If P4 = 1 (default), defrost is activated provided that the evaporator temperature is lower than the d2 threshold.

Cabinet light on/off (if u1 or u2 = 2)

Touch the DOWN key.

	5	ADDITIONAL FUNC	CTIONS				
	5.1 View the evaporator temperature						
	Check that the keypad is not locked.						
1. Touch the DOWN key for 4		<u>√</u>	Touch the DOWN key for 4 s.				
	2.	() SET	Touch the ON/STAND-BY key (or do not operate for 30 s) to exit the procedure.				

6 SETTINGS

Check that the device is switched on and the keypad is not locked.				
1.	⊕set	Touch the ON/STAND-BY key for 6 s: once 3 s have elapsed the display will switch off, once 6 s have elapsed the display will show the label "PA".		
2.	() SET	Touch the ON/STAND-BY key again.		
3.		Touch the UP or DOWN key within 30 s to set the PS value (default "-19").		
4.	() SET	Touch the ON/STAND-BY key: the display will show the label *SP".		
5.		Touch the UP or DOWN key to select a parameter.		
6.	() SET	Touch the ON/STAND-BY key.		
7.		Touch the UP or DOWN key within 30 s to set the value.		
8.	() SET	Touch the ON/STAND-BY key.		
9.	⊕set	Touch the ON/STAND-BY key for 3 s (or do not operate for 30 s) to exit the procedure.		

Restore the factory settings (default) and store customized settings as default

O_O

Check that the factory settings are appropriate; see the section ${\it CONFIGURATION}$

the storing of customized settings overwrites the default.

Check that the device is switched on and the keypad is not locked.					
1. () SET d			Touch the ON/STAND-BY key for 6 s: once 3 s have elapsed the display will switch off, once 6 s have elapsed the display will show the label "PA".		
2.	10	SET	Touch the ON/STAND-BY key again.		
3.	1		Touch the UP or DOWN key within 30 s to set "49".		
4.	4. () SET		Touch the ON/STAND-BY key again: the display will show the label " ${\bf dF}$ ".		
5.	() SET		Touch the ON/STAND-BY key again.		
6. (Touch the UP or DOWN key within 30 s to set the value.		
VAL. DESCRIPTION 1 value to res		DESCRIPTI	ON		
		value to re	store the factory settings (default)		
	-2 value to store customized settings as default		ore customized settings as default		
7.	<u></u>	∋∈T	Touch the SET key: the device will exit the procedure.		
。 Laser I		et I	Touch the SET key 2 s before action 6. (or do not operate for		

6.	Touch the UP or DOWN key Within 30 s to set the value.							
	VAL		CRIPTIO	ON				
	1	valu	ie to res	store the factory settings (default)				
	<u> </u>		ie to sto	ore customized settings as default				
7. a set				Touch the SET key: the device will exit the procedure.				
8. ASET				Touch the SET key 2 s before ac	tion 6. (or do not operate for			
0.	aset		ı	30 s) to exit the procedure before	nand.			
_								
7	CON	FIGUR	ATION	PARAMETERS				
0=	N.	PAR.	DEF.	SETPOINT	MIN MAX.			
	1	SP	0	setpoint	r1 r2			
-	N.	PAR.	DEF.	ANALOGUE INPUTS	MIN MAX.			
	2	01	0	cabinet probe offset	-99 99 °C/°F			
	3	02	0	evaporator probe offset	-99 99 °C/°F			
				not available in EV3L21				
	4	P2	0	temperature unit of measure-	0 = °C 1 = °F			
	_	D.4	_	ment				
4	5	P4	1	enable evaporator probe not available in EV3L21	0 = no 1 = yes			
	6	P8	4	filter for cabinet temperature	1 10			
		'	"	display	1 = quick			
					4 = normal			
					7 = slow			
					10= very slow			
	N.	PAR.	DEF.	REGULATION	MIN MAX.			
43	7	r0	-2	setpoint differential	-99 0 °C/°F symmetric			
4	0	r1	-40	minimum setpoint	0 99 °C/°F asymmetric -99 99 °C/°F			
	8 9	r2	50	maximum setpoint	-99 99 °C/°F			
-	N.	PAR.	DEF.	COMPRESSOR	MIN MAX.			
	10	CO	0	compressor on delay after pow-	0 99 s x 10			
				er-on				
	11	C1	5	delay between 2 compressor	0 99 min			
£				switch-ons				
	12	C2	3	compressor off minimum time	0 99 min			
	13	C4	50	percentage compressor on during	referred to the average time			
				cabinet probe alarm	compressor on 0 On			
					On= 100 %			
	N.	PAR.	DEF.	DEFROST	MIN MAX.			
	14	d0	8	automatic defrost interval	-99 1 min (for unit test)			
					1 99 h			
	15	d1	0	defrost type	0 = electric			
	4.	10		not available in EV3L21	1 = hot gas			
	16	d2	2	threshold for defrost end not available in EV3L21	-99 99 °C/°F			
	17	d3	30	defrost duration	0 99 min			
•				not available in EV3L21	if P4 = 1, maximum duration			
•	18	d7	2	dripping time	0 99 min			
				not available in EV3L21				
	19	d8	0	defrost relay status during drip-	0 = not active			
				ping not available in EV3L21	1 = active			
	20	d9	0	compressor on consecutive time	0 99 min			
				for hot gas defrost				
				not available in EV3L21				
	N.	PAR.	DEF.	ALARMS	MIN MAX.			
	21	A1	-99	threshold for low temperature	-99 99 °C/°F			
	22	A4	99	threshold for high temperature	-99 99 °C/°F			
4				alarm				
72	23	A 5	-2	high/low temperature alarms re-	-99 0 °C/°F absolute alarms			
				set differential	0 99 °C/°F alarms relative to			
			_		setpoint			
	24	A7	2	high/low temperature alarms de- lay	0 99 min x 10 1 h after defrost			
	N.	PAR.	DEF.	FANS not available in EV3L21	MIN MAX.			
	25	FO	0	evaporator fan mode during	0 = on			
			-	normal operation	1 = on if compressor on			
					2 = thermoregulated (with			
					F1			
_	26	F1	-1	threshold for evaporator fan op-	-99 99 °C/°F			
्र	27	F2	0	eration	differential = 1 °C/2 °F 0 = off 1 = on			
	21	F2	"	evaporator fan mode during dripping	0 = 011			
	28	F3	2	evaporator fan off time	0 99 min			
	2	F4	30	evaporator fan off time with	0 99 s x 10			
				compressor off				
	30	F5	10	evaporator fan on time with	0 99 s x 10			
				compressor off				
	N. 31	PAR.	DEF.	door switch input function	MIN MAX. 0 = cabinet light on			
	31	10	"	options 0 and 2 not available	1 = compressor + evapora-			
				in EV3L21	tor fan off, cabinet light			
					on			
-					2 = evaporator fan off, cabi-			
		14			net light on			
	32	i1	0	door switch input activation	0 = with contact closed 1 = with contact open			
	33	i2	30	open door alarm delay; also reg-	-1 99 min			
				ulation inhibition maximum time	-1 = disabled			
				with door open				
	N.	PAR.	DEF.	DIGITAL OUTPUTS	MIN MAX.			
	34	u1	1	auxiliary output 1 configuration	0 = evaporator fan			
				(relay K2) not available in EV3L21	1 = defrost 2 = cabinet light			
	35	u2	0	auxiliary output 2 configuration	0 = evaporator fan			
				(relay K3)	1 = defrost			
				not available in EV3L21 and	2 = cabinet light			
l ——				EV3L22				
	N.	PAR.	DEF.	SAFETIES	MIN MAX.			
	36 37	nS PS	-19	password	0 99 x 10,000 -99 99 min			
	٦′ ا	۱ ، ۲	''	[0 = disabilitata			

EVCO S.p.A. | EV3 L series | Instruction sheet ver. 1.0 | Code 1043L20I103 | Page 2 of 2 | PT 10/18 8 ALARMS COD. DESCRIPTION RESET REMEDIES P1 cabinet probe alarm automatic check probe integrity P2 evaporator probe alarm automatic - check electrical connection check A1 low temperature alarm automatic

AH	high temperatu	re alarm	automat	ic	check A4	
id	open door alarr	m	automat	ic	check i0 e i1	
9	TECHNICAL SP	ECIFICATIO	NS			
	6.0			٠. ا		
Purpose of the control device Construction of the control device					ion controller	
Contai		iti oi device			in electronic device , self-extinguishing	
	ory of heat and fi	iro rosistanco		Diack,	, sell-extiliguishing	
	rements	ile resistance		ם ו		
	ixed screw termi	nal blocks: 75	0 x 33 0	With r	removable screw terminal blocks: 75.0 x	
	mm (2 15/16 x				x 52.5 mm (2 15/16 x 1 5/16 x 2 1/16	
	1, 75.0 x 33.0 x		,		r EV3L21, 75.0 x 33.0 x 81.5 mm (2	
	2 5/16 in) other			15/16 x 1 5/16 x 3 3/16 in) otherwise		
	ing methods for		vice	To be fitted to a panel, snap-in brackets pro-		
				vided		
Degre	e of protection p	provided by the	ne cover-	IP65 (front)		
ing						
	ction method					
Fixed	screw terminal	blocks for wir	es up to	Remo	vable screw terminal blocks for wires up	
2,5 mi					mm²; by request	
	um permitted lei		ection cabl			
	supply: 10 m (3				gue inputs: 10 m (32.8 ft)	
	inputs: 10 m (3	-			ll outputs: 10 m (32.8 ft)	
	ting temperature	!			0 to 55 °C (from 32 to 131 °F)	
	ge temperature				-25 to 70 °C (from -13 to 158 °F)	
Opera	ting humidity			10 to	ve humidity without condensate from	
Polluti	on status of the	control device		2	70 /0	
Confor		control device				
	2011/65/CE	WEE	E 2012/19	/FU	REACH (EC) Regulation	
110110	2011/00/02	"	2012/1/	, 20	1907/2006	
EMC 2	014/30/UE			LVD 2014/35/UE		
Power	supply			230 VAC (+10% -15%), 50/60 Hz (±3 Hz),		
	,				3 VA isolated	
Earthi	ng methods for t	he control dev	rice	None		
Rated	impulse-withstar	nd voltage		4 KV		
Over-v	oltage category			Ш		
Softwa	are class and stru	ıcture		А		
Analog	gue inputs			- 1 in EV3L21 (cabinet probe)		
				- 2 in EV3L22 and EV3L23 (cabinet probe		
				and evaporator probe)		
NITO				for NTC probes		
NTC p	robes	Sensor type Measurement field		B3435 (10 KΩ @ 25 °C, 77 °F)		
			rneid	From -40 to 90 °C (from -40 to 194 °F)		
		Resolution		- 0.1 °C (0.1 °F) between -9.9 and 9.9 - 1 °C (1 °F) otherwise		
Digital	inputs			1 dry contact (door switch)		
Dry co		Contact type		5 VDC, 1.5 mA		
,		Protection		None		
Digital	outputs			- 1 in EV3L21 (K1)		
, i	·			- 2 in EV3L22 (K1 and K2)		
				- 3 in EV3L23 (K1, K2 and K3)		
					electro-mechanical relays	
				The maximum current allowed on the		
				loads is 10 A		
	Relay K1 (compressor):				SPST, 16 A res. @ 250 VAC	
	Relay K2 (auxiliary output 1, default defrost):				SPDT, 8 A res. @ 250 VAC	
	Relay K3 (auxiliary output 2, default evapo-				SPST, 5 A res. @ 250 VAC	
	rator fan):			<u> </u>		
	or Type 2 Actio		2	Type 1		
	Additional features of Type 1 or Type 2 ac-			С		
Displa	Me			2 digits custom display 17 mm (11/14 in)		
Displa	ys			2 digits custom display 17 mm (11/16 in) high, with function icons		
				I mgm,	with function leans	



N.B.
The device must be disposed of according to local regulations governing the collection of electrical and electronic waste.

This document and the solutions contained therein are the intellectual property of EVCO and thus protected by the Italian Intellectual Property Rights Code (CPI). EVCO imposes an absolute ban on the full or partial reproduction and disclosure of the content other than with the express approval of EVCO. The $\,$ $\hbox{\it customer (manufacturer, installer or end-user) assumes all \ responsibility \ for \ the \ configuration \ of \ the \ de-leading \ description \ descri$ vice. EVCO accepts no liability for any possible errors in this document and reserves the right to make any changes, at any time without prejudice to the essential functional and safety features of the equip-

